

Speed-Rail® Aluminum Slip-On Fittings

- Aluminum alloy 535—the most corrosive resistant aluminum alloy available
- High strength, as cast
- Bright attractive finish
- Conforms to ASTM B26 and B179
- Set screw features proprietary internal/external knurl cup point. Plated steel supplied
- Tremendous resistance to loosening due to vibration
- Full contact of point greatly resists pull-out and rotational slip

All fittings are available in an optional anodized clear finish and with stainless steel type 304 set screws.

Optional Stainless Steel Set Screw




SR81612

Use with Fittings for:	Set Screw	302 Alloy Stainless
3/4" Pipe	5/16-16 x 5/16"	SR81312
1", 1 1/4", 1 1/2" or 2" Pipe	3/8-16 x 7/16"	SR81612

Elbow



SR3-7




Pipe Size	OD Size	a	b	c	d	Alloy 535 Aluminum
3/4"	1.05"	1 1/6"	1 1/2"	2 11/32"	5/8"	SR3-5
1"	1.315"	1 11/32"	1 25/32"	2 13/16"	23/32"	SR3-6
1 1/4"	1.66"	1 11/16"	2"	3 1/4"	7/8"	SR3-7
1 1/2"	1.90"	1 15/16"	2 11/32"	3 23/32"	1"	SR3-8
2"	2.375"	2 13/32"	2"	4 21/32"	1 1/4"	SR3-9

Adjustable Elbow



SR3AE-8

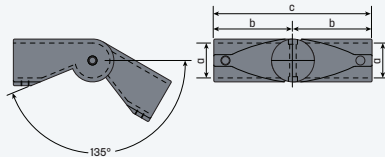


Pipe Size	OD Size	a	b	c	Alloy 535 Aluminum
1 1/4"	1.66"	1 11/16"	3 13/16"	7 5/8"	SR3AE-7
1 1/2"	1.90"	1 15/16"	4 1/2"	9"	SR3AE-8

Tee



SR5-8




Pipe Size	OD Size	a	b	d	e	Alloy 535 Aluminum
3/4"	1.05"	1 1/16"	1 1/2"	2 11/32"	2"	SR5-5
1"	1.315"	1 11/32"	1 25/32"	2 27/32"	2 3/8"	SR5-6
1 1/4"	1.66"	1 11/16"	2"	3 1/4"	2 3/4"	SR5-7
1 1/2"	1.90"	1 15/16"	2 5/16"	3 23/32"	3 3/8"	SR5-8
2"	2.375"	2 13/32"	3"	4 21/32"	3 7/8"	SR5-9

Tee



SR5E-7



Pipe Size	OD Size	a	b	c	d	e	Alloy 535 Aluminum
3/4"	1.05"	1 1/16"	1 1/2"	2 1/4"	5/8"	1 1/2"	SR5E-5
1"	1.315"	1 11/32"	1 3/4"	2 5/8"	23/32"	1 3/4"	SR5E-6
1 1/4"	1.66"	1 11/16"	2"	3"	7/8"	2"	SR5E-7
1 1/2"	1.90"	1 15/16"	2 1/4"	3 7/16"	1"	2 5/16"	SR5E-8