


# Inside of Post Mount - Swaged

You can use our Invisiware® Fixed Tabs, Threaded Tabs or Lag Eyes to mount Adjust-A-Jaw® Tensioners to your end posts. Or, you can mount them using flat bar or angle iron welded to your post with holes drilled to accept the clevis.

Unlike many common turnbuckles, Ultra-tec® Tensioners have no sharp edges, no crevices to collect dust and dirt, no unsightly nuts on the end, ugly swaged shanks or anything that will scratch or snag.

## Adjust-A-Jaw® Tensioners

The Adjust-A-Jaw® is an exposed, swaged, tensioning, face-of-the-post-mounted fitting that can be used on level or pitched runs. The Adjust-A-Jaw can be used with any fitting on the opposite end of the run.

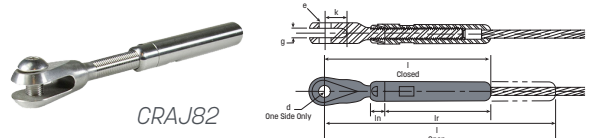


Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	d	e	g	k	Closed l	Open l	ln	lr	t	Screw is Included	Also Order Ferrule No.	Stainless
1/8"	.26"	1/4-28	.260"	.56"	4.30"	5.99"	.375"	2.75"	5/16-24 LH	CRSC6	CRF4	CRAJ62
3/16"	.26"	1/4-28	.260"	.56"	4.30"	5.99"	.375"	2.75"	5/16-24 LH	CRSC6	CRF6	CRAJ62
1/4"	.39"	3/8-24	.313"	.75"	4.87"	6.43"	.500"	3.00"	7/16-20 LH	CRSC8	CRF8	CRAJ82
5/16"	.39"	3/8-24	.348"	.87"	6.74"	9.28"	.620"	4.50"	9/16-18 RH	CRSC8	CRF10	CRAJ122
3/8"	.39"	3/8-24	.348"	.87"	6.74"	9.28"	.620"	4.50"	9/16-18 RH	CRSC8	CRF12	CRAJ122

## Ultra-tec® Fixed Jaw

The Fixed Jaw is an exposed, swaged, non-tensioning, face-of-the-post-mounted fitting that is suitable for use on level or pitched runs.

This fitting was designed to be compatible in appearance to the Adjust-A-Jaw® tensioning fitting. The Fixed Jaw can be used with any tensioning fitting on the opposite end of the run.

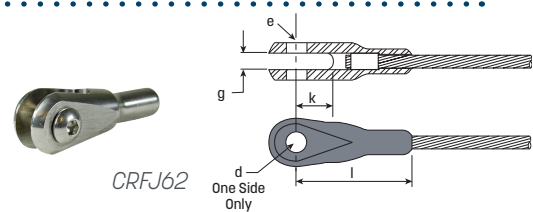


Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	d	e*	g	k	l	Screw is Included	Also Order Ferrule No.	Stainless
1/8"	.26"	1/4-28	.260"	.56"	1.75"	CRSC6	CRF4	CRFJ62
3/16"	.26"	1/4-28	.260"	.56"	1.75"	CRSC6	CRF6	CRFJ62
1/4"	.39"	3/8-24	.313"	.75"	2.12"	CRSC8	CRF8	CRFJ82
5/16"	.39"	3/8-24	.348"	.87"	2.25"	CRSC8	CRF10	CRFJ122
3/8"	.39"	3/8-24	.348"	.87"	2.25"	CRSC8	CRF12	CRFJ122

## Ultra-tec® Clip-On Fixed Jaw

The Clip-On Fixed Jaw is externally a duplicate of the Fixed Jaw. The Clip-On Fixed Jaw was created for applications that called for factory swaged fittings on both ends of the cable, without requiring over-sized holes through the intermediate posts (so an entire Fixed Jaw could pass through). This fitting accomplishes that with a .250" diameter ferrule that is pre-swaged to the cable.

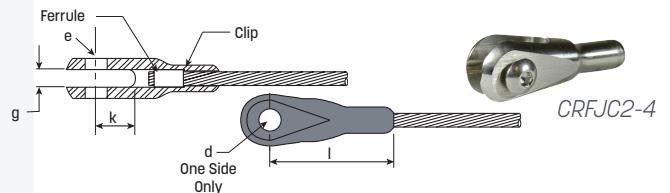

Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	d	e*	g	k	l	Screw is Included	Also Order Ferrule No.	Stainless
1/8"	.26"	1/4-28	.260"	.56"	1.75"	CRSC6	CRF4	CRFJC2-4
3/16"	.26"	1/4-28	.260"	.56"	1.75"	CRSC6	CRF6	CRFJC2-6

