


Inside of Post Mount - Swaged

Adjust-A-Body® with Threaded Eye Tensioner

The Adjust-A-Body® with Threaded Eye fitting is an exposed, swaged, tensioning, face-of-the-post-mounted fitting that can be used on level or pitched runs.

The Adjust-A-Body with Threaded Eye can be used with any fitting on the opposite end of the run.

This fitting attaches to the end post by installing a Threaded Tab (page 156) or Lag Eye (page 156) into a hole in the end post and attaching the threaded eye portion with a Button Head Screw (CRSC6 or CRSC8-included). The cable is retained within the body portion of the fitting by a ferrule swaged onto the end of the cable. The lock nut is installed all the way onto the threaded jaw first, followed by the body, which is secured onto the jaw, creating tension on the cable. Once sufficient tension is achieved, the lock nut is secured against the end of the body to secure the fitting from loosening.

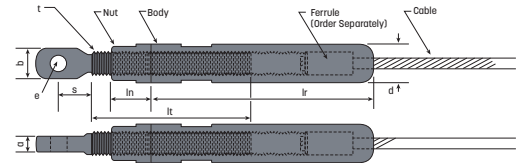


Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	e	a	b	s	t	lt	ln	lr	d	(Included) Use with Screw No.	Also Order Ferrule No.	Stainless
1/8"	1/4-28	.233"/.229"	.500"	.44"	5/16-24 LH	2.00"	.375"	2.75"	.500"	CRSC6	CRF4	CRAJTE6
3/16"	1/4-28	.233"/.229"	.500"	.44"	5/16-24 LH	2.00"	.375"	2.75"	.500"	CRSC6	CRF6	CRAJTE6
1/4"	3/8-24	.295"/.285"	.844"	.68"	7/16-20 LH	2.50"	.500"	3.00"	.625"	CRSC8	CRF8	CRAJTE8

Adjust-A-Body® with Hanger Bolt Tensioner

The Adjust-A-Body® with Hanger Bolt is a swaged, tensioning, face-of-the-post-mounted fitting that is recommended for level runs only. The Adjust-A-Body with Hanger Bolt can be used with any fitting on the opposite end of the run.

We do not recommend this fitting being installed in pitched applications because it would require drilling all of the holes in the end post at an angle.

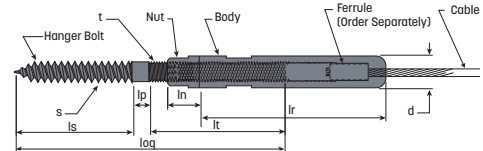


Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	s	t	ls	lp*	lt	loq	ln	lr	d	Also Order Ferrule No.	Stainless
1/8"	5/16"	5/16-24 LH	1.50"	.250"	2.00"	3.75"	.375"	2.75"	.500"	CRF4	CRAJB6
3/16"	5/16"	5/16-24 LH	1.50"	.250"	2.00"	3.75"	.375"	2.75"	.500"	CRF6	CRAJB6
1/4"	7/16"	7/16-20 LH	2.00"	.250"	2.50"	4.75"	.500"	3.00"	.625"	CRF8	CRAJB8

Adjust-A-Body® with Extended Length Hanger Bolt Tensioner

This fitting is identical to the Adjust-a-Body® with Hanger Bolt shown above except it is used for sleeved posts with an outside diameter of greater than 4-1/2". The extended length hanger bolt is 3" long, designed to reach past sleeves and drywall to find the wood post or frame underneath.

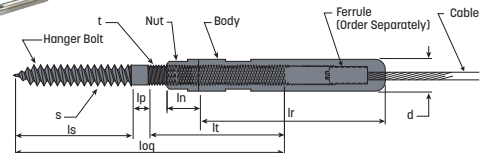

Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	s	t	ls	lp*	lt	loq	ln	lr	d	Also Order Ferrule No.	Stainless
1/8"	5/16"	5/16-24 LH	1.50"	1.75"	2.00"	5.25"	.375"	2.75"	.500"	CRF4	CRAJB6L
3/16"	5/16"	5/16-24 LH	1.50"	1.75"	2.00"	5.25"	.375"	2.75"	.500"	CRF6	CRAJB6L