


# Inside of Post Mount - Swaged

## Adjust-A-Body® with Threaded Bolt Tensioner

The Adjust-A-Body® with Threaded Bolt is an exposed, swaged, tensioning, face-of-the-post-mounted fitting that is recommended for level runs only.

The Adjust-A-Body with Threaded Bolt can be used with any fitting on the opposite end of the run.

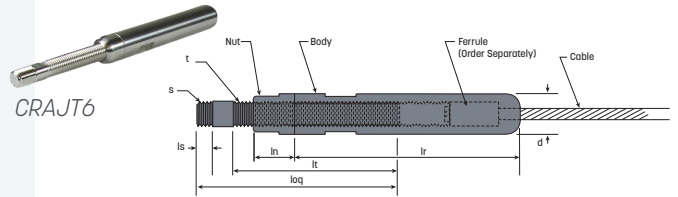


Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	s	t	ls	lt	loq	ln	lr	d	Also Order Ferrule No.	Stainless
1/8"	5/16-24	5/16-24 LH	.375"	2.00"	2.625"	.375"	2.75"	.500"	CRF4	CRAJT6
3/16"	5/16-24	5/16-24 LH	.375"	2.00"	2.625"	.375"	2.75"	.500"	CRF6	CRAJT6
1/4"	5/16-24	7/16-20 LH	.375"	2.50"	3.125"	.50"	3.00"	.625"	CRF8	CRAJT8
5/16"	1/2-20	9/16-18 LH	.62"	3.00"	4.00"	.62"	4.50"	.744"	CRF10	CRAJT12
3/8"	1/2-20	9/16-18 LH	.62"	3.00"	4.00"	.62"	4.50"	.744"	CRF12	CRAJT12

## Adjust-A-Body® with Concrete Anchor Bolt Tensioner

The Adjust-A-Body® with Concrete Anchor Bolt is an exposed, swaged, tensioning, face-of-the-surface-mounted fitting that is recommended for level runs terminating at a concrete surface only. The Adjust-A-Body with Concrete Anchor Bolt can be used with any fitting on the opposite end of the run.

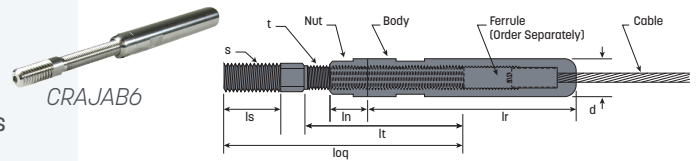

Use of this fitting requires an appropriately sized ferrule that is swaged onto the cable, which must also be purchased separately.

Cable	s	t	ls	lt	loq	ln	lr	d	Red Head Anchor Steel	Red Head Anchor Stainless	Also Order Ferrule No.	Stainless
1/8"	3/8-16	5/16-24 LH	.500"	2.313"	3.188"	.375"	2.75"	.500"	RL-38	SSRM-38*	CRF4	CRAJAB6
3/16"	3/8-16	5/16-24 LH	.500"	2.313"	3.188"	.375"	2.75"	.500"	RL-38	SSRM-38*	CRF6	CRAJAB6
1/4"	1/2-13	7/16-20 LH	1.125"	2.50"	3.938"	.500"	3.00"	.625"	RL-12	SSRM-12*	CRF8	CRAJAB8

See [WagnerCompanies.com/catalog/page-152](http://WagnerCompanies.com/catalog/page-152) for information on cable installation.

\* Drill 1/2" hole for SSRM-38 and 5/8" hole for SSRM-12

Learn more or order at [WagnerCompanies.com](http://WagnerCompanies.com)

