


Heavy Flush Base Flanges



Use **Wagner Heavy Flush Base Flanges** for a Clean, Contemporary Look.
Set Screws are not for structural use.

Other alloys are available on special request. Supplied with a mill finish. Contact **Wagner** regarding polishing, plating, galvanizing, anodizing or special finishes - rfq@mailwagner.com.

	Standard Alloys	Thickness
Steel	1008	.134"
Aluminum	3003	.125"
Stainless Steel	Type 304	.120"
Bronze	C28000	.125"
Brass	C26000	.125"

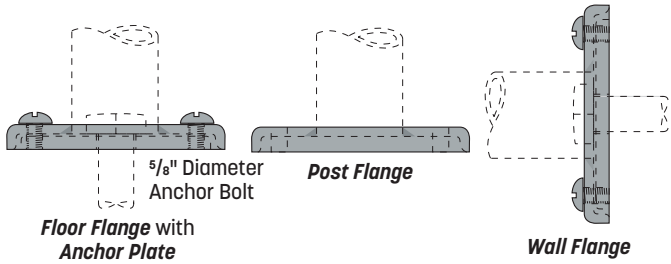

Heavy Flush Base Plain Flange

Pipe Size	OD	STEEL	ALUMINUM	MILL FIN. STAINLESS	SATIN STAINLESS	BRASS	BRONZE
.75"		2510T		2590T			
1.00"		2518T	2558T	2598T		BRS2518T	
3/4"	1.05"	2510	2550	2590			
	1.25"	2526T		2606T		BRS2526T	
1"	1.315"	2518	2558	2598			BZ2518
	1.50"	2534T	2574T	2614T	2614T.4	BRS2534T	
1/4"	1.66"	2526	2566	2606	2606.4		BZ2526
1/2"	1.90"	2534	2574	2614	2614.4		BZ2534
	2.00"	2542T	2582T	2622T		BRS2542T	
2"	2.375"	2542	2582	2622			
2 1/2"	2.875"	2545	2585	2625			
	3.00"	2646T	2686T	2626T			
3"	3.50"	2546	2586	2626			



Heavy Flush Base Flange with Three Holes

Pipe Size	OD	STEEL	ALUMINUM	STAINLESS
.75"		2511AT		
3/4"	1.05"	2511A		
	1.315"	2519A		
	1.50"	2535AT	2575AT	2615AT
1/4"	1.66"	2527A	2567A	2607A
1/2"	1.90"	2535A	2575A	2615A
	2.00"	2543AT		2623AT
2"	2.375"	2543A		2623A



Heavy Flush Base Flange with Four Holes

Pipe Size	OD	STEEL	ALUMINUM	STAINLESS
.75"		2512T		
1"	1.315"	2520		
	1.50"	2536T		2616T
1/4"	1.66"	2528		2608
1/2"	1.90"	2536	2576	2616
	2.00"	2544T		2624T
2"	2.375"			2624



Heavy Flush Base Flange with Two Holes

Pipe Size	OD	STEEL	ALUMINUM	STAINLESS
.75"		2511T		
3/4"	1.05"	2511		
	1.25"	2527T		
1"	1.315"	2519		
	1.50"	2535T	2575T	2615T
1/4"	1.66"	2527	2567	2607
1/2"	1.90"	2535	2575	2615
	2.00"	2543T		
2"	2.375"	2543		



Heavy Base Offset Flange with One Hole

This **Offset Flange** may be used to create **Wall Returns** when combined with stock **Wagner Elbows** shown on pages 39 to 46.

Pipe Size	Tube OD	STEEL	ALUMINUM	STAINLESS
	1.50"	2534RT	2574RT	2614RT
1/4"	1.66"	2526R	2566R	2606R.4*
1/2"	1.90"	2534R	2574R	2614R
	2.00"	2542RT		

* Satin Finish. For Mill Finish, order **2606R**

Note: Verify material OD prior to order - see page 57.

Universal Anchor Plate

May be used with two, three or four hole **Flanges**. Use Stainless Steel or Zinc Plated Steel **Anchor Plates** with Aluminum **Flanges**.

3/16" **Anchor Plate** is provided with six holes for mounting **Screws**. Center mounting hole is 1/16" diameter.

Fasten the **Anchor Plate** to the wall or floor with a 5/8" **Anchor Bolt** and then bolt the **Flanges** to the **Plate** with two, three or four **Screws** - as appropriate.



Pipe Size	OD	STEEL	ZINC PLATED STEEL	STAINLESS	Plate Diameter	Bolt Size
.75"		B1416	PLB1416	B1516	3 1/4"	1/4" x 3/8"
1.00"		B1416	PLB1416	B1516	3 1/4"	1/4" x 3/8"
3/4"	1.05"	B1416	PLB1416	B1516	3 1/4"	1/4" x 3/8"
	1.25"	B1416	PLB1416	B1516	3 1/4"	1/4" x 3/8"
1"	1.315"	B1432	PLB1432	B1532	3 1/2"	1/4" x 3/8"
	1.50"	B1432	PLB1432	B1532	3 1/2"	1/4" x 3/8"
1/4"	1.66"	B1432	PLB1432	B1532	3 1/2"	1/4" x 3/8"
1/2"	1.90"	B1440	PLB1440	B1540	4"	1/4" x 3/8"
	2.00"	B1440	PLB1440	B1540	4"	1/4" x 3/8"
2"	2.375"	B1448	PLB1448	B1548	4 1/2"	3/8" x 3/8"

For **Blank Disks**, Refer to page 66.

NUMBERS IN BOLD TYPE are typically in stock. Other items may not be available for immediate shipment or are made-to-order - requiring a minimum quantity and a longer lead time. Visit shopwagner.com for availability.